


All dimensions are in mm

TECHNICAL SPECIFICATIONS

Light Source	: COB-Chip on Board
Power Consumption	: 8W, 10W, 12W, 15W, 18W, 22W, 24W, 27W, 29W, 31W, 35W, 37W, 40W, 45W, 48W, 54W, 60W, 65W, 68W, 75W
90 CRI 80 CRI	: 3000 K 3500 K 4000 K 5700 K
Driver	: Constant Current AC-DC
Input Voltage Range	: 220-240 V
Output Voltage	: 33V-37V DC 48V-52V DC (68W, 75W)
Output Current	: 200 mA, 250 mA, 300 mA, 400 mA, 500 mA, 600 mA, 650 mA, 700 mA, 750 mA, 800 mA, 900 mA, 950 mA, 1050 mA, 1150 mA, 1200 mA, 1350 mA, 1500 mA, 1600 mA
Power Factor	: >0.98
THD	: <10%

LED PARAMETERS

8W	3000 K, 3500 K, 4000 K, 5700 K	700 lm, 720 lm, 750 lm, 870 lm
10W	3000 K, 3500 K, 4000 K, 5700 K	860 lm, 890 lm, 910 lm, 1050 lm
12W	3000 K, 3500 K, 4000 K, 5700 K	1040 lm, 1098 lm, 1150 lm, 1260 lm
15W	3000 K, 3500 K, 4000 K, 5700 K	1556 lm, 1613 lm, 1635 lm, 1833 lm
18W	3000 K, 3500 K, 4000 K, 5700 K	1957 lm, 2010 lm, 2061 lm, 2276 lm
22W	3000 K, 3500 K, 4000 K, 5700 K	2289 lm, 2303 lm, 2426 lm, 2654 lm
24W	3000 K, 3500 K, 4000 K, 5700 K	2442 lm, 2513 lm, 2562 lm, 2806 lm
27W	3000 K, 3500 K, 4000 K, 5700 K	2634 lm, 2664 lm, 2722 lm, 3055 lm
29W	3000 K, 3500 K, 4000 K, 5700 K	2928 lm, 3048 lm, 3099 lm, 3275 lm
31W	3000 K, 3500 K, 4000 K, 5700 K	3044 lm, 3165 lm, 3224 lm, 3519 lm
35W	3000 K, 3500 K, 4000 K, 5700 K	3399 lm, 3496 lm, 3545 lm, 3892 lm
37W	3000 K, 3500 K, 4000 K, 5700 K	3497 lm, 3602 lm, 3710 lm, 4110 lm
40W	3000 K, 3500 K, 4000 K, 5700 K	3764 lm, 3877 lm, 3933 lm, 4332 lm
45W	3000 K, 3500 K, 4000 K, 5700 K	4249 lm, 4339 lm, 4530 lm, 4856 lm
48W	3000 K, 3500 K, 4000 K, 5700 K	4767 lm, 4897 lm, 4978 lm, 5345 lm
54W	3000 K, 3500 K, 4000 K, 5700 K	5386 lm, 5474 lm, 5572 lm, 6245 lm
60W	3000 K, 3500 K, 4000 K, 5700 K	5845 lm, 5905 lm, 6032 lm, 6780 lm
65W	3000 K, 3500 K, 4000 K, 5700 K	6245 lm, 6376 lm, 6504 lm, 7175 lm
68W	3000 K, 3500 K, 4000 K, 5700 K	6598 lm, 6661 lm, 6798 lm, 7165 lm
75W	3000 K, 3500 K, 4000 K, 5700 K	7235 lm, 7387 lm, 7469 lm, 7899 lm



Color choice

Black Grey White

Driver options

90

80

CRI IP20 COB


DALI Tunable

Application area for retail space:
Focal area | Peripheral | Show Window | Wall Display

All dimensions are in mm


MARLENE-NANO

Wattage:
8W | 10W | 12W

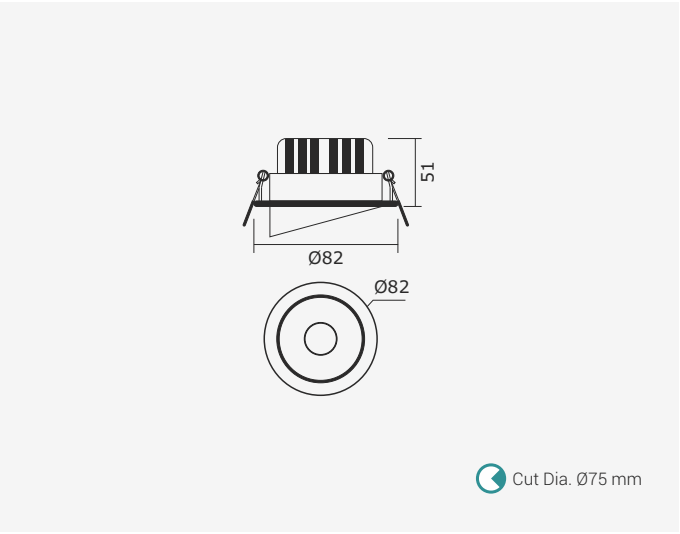


MARLENE-SM

Wattage :
15W | 18W | 22W | 24W | 27W

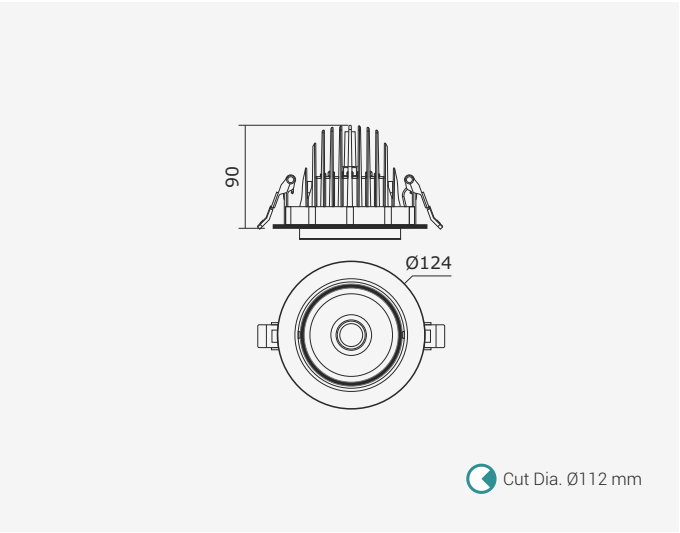

MARLENE-M


Wattage:
22W | 24W | 27W | 29W
31W | 35W

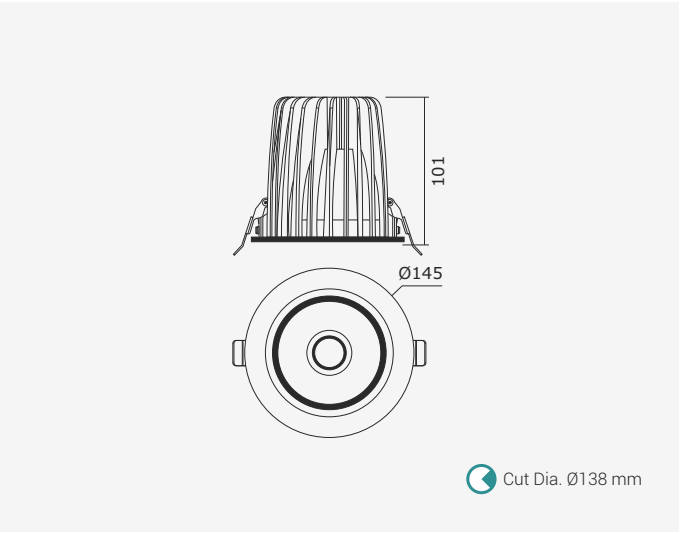

All dimensions are in mm




MARLENE-L
Wattage:
31W | 35W | 37W | 40W

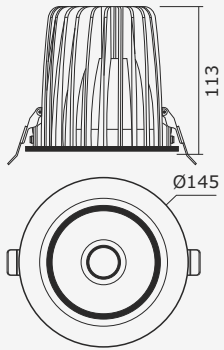

 Cut Dia. Ø138 mm




MARLENE-HD
Wattage:
29W | 31W | 35W | 37W



 Cut Dia. Ø145 mm



MARLENE-EXT
Wattage:
45W | 48W | 54W | 60W
65W | 68W | 75W

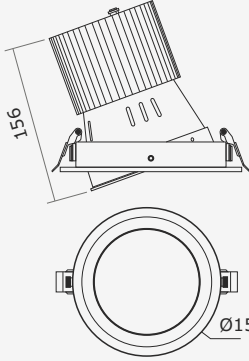


 Cut Dia. Ø145 mm

All dimensions are in mm



ELSA-ASY
Wattage:
22W | 24W | 27W
29W | 31W | 35W



 Cut Dia. Ø130 mm



All dimensions are in mm

KEY FEATURES

- Aesthetically and functionally designed high-performance recessed downlight luminaire
- Housing made entirely of CRCA sheet steel for durability and longevity
- High-efficiency passive cooling light head constructed from die-cast aluminum
- Individually rotatable light head with 350° rotation and 35° tilt
- Anti-glare die-cast aluminum front ring for a sleek and modern design
- High-efficiency vacuum metalized polycarbonate reflector with beam angle options: 12°, 24°, 45°, 60°
- Utilizes chip-on-board (COB) LED technology for superior energy efficiency
- Features isolated high-efficiency electronic driver technology for optimal performance
- Easy installation with a heavy-gauge clamp adjustment locking system, ideal for false ceilings
- Available in powder-coated shades white, black, and grey

TECHNICAL SPECIFICATIONS

Light Source	: COB-Chip on Board
Power Consumption	: 20W, 22W, 24W, 27W, 29W, 31W, 35W, 37W
90 CRI	: 3000 K 3500 K 4000 K
80 CRI	: 5700 K
Driver	: Constant Current AC-DC
Input Voltage Range	: 220-240 V
Output Voltage	: 33V-37V DC
Output Current	: 600 mA, 650 mA, 700 mA, 750 mA, 800 mA, 900 mA, 950 mA
Power Factor	: >0.98
THD	: <10%

LED PARAMETERS


X1, X2, X3

20W	3000 K, 3500 K, 4000 K, 5000 K	2214 lm, 2334 lm, 2369 lm, 2551 lm
22W	3000 K, 3500 K, 4000 K, 5000 K	2289 lm, 2303 lm, 2426 lm, 2654 lm
24W	3000 K, 3500 K, 4000 K, 5000 K	2442 lm, 2513 lm, 2562 lm, 2806 lm
27W	3000 K, 3500 K, 4000 K, 5000 K	2634 lm, 2664 lm, 2722 lm, 3055 lm
29W	3000 K, 3500 K, 4000 K, 5000 K	2867 lm, 2951 lm, 2997 lm, 3265 lm
31W	3000 K, 3500 K, 4000 K, 5000 K	3030 lm, 3114 lm, 3266 lm, 3496 lm
35W	3000 K, 3500 K, 4000 K, 5000 K	3343 lm, 3445 lm, 3573 lm, 3875 lm
37W	3000 K, 3500 K, 4000 K, 5000 K	3497 lm, 3602 lm, 3710 lm, 4090 lm

Application area for retail space:

Focal area | Peripheral | Show Window | Wall Display


Available Reflector Deg.



Color choice



Black Grey White



CRI IP20 COB

Driver options




DALI Tunable

All dimensions are in mm



DELLA SM I

Wattage :
1X22W | 1X24W | 1X27W

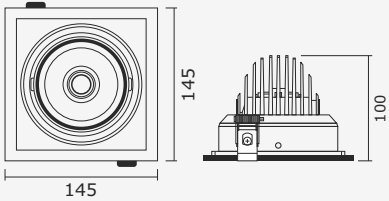


Cut Sq. 130X130 mm



DELLA SM II

Wattage :
2X22W | 2X24W | 2X27W

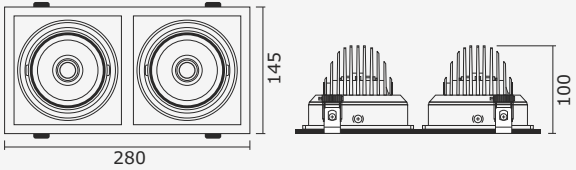

Cut Sq. 130X265 mm

All dimensions are in mm




IS 10322(PART 5/SEC 2):2012
R-71012963



DELLA-HD I

Wattage:
1X29W | 1X31W
1X35W | 1X37W

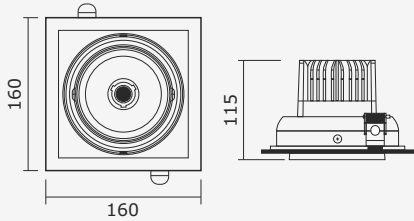


Cut Sq. 148X148 mm



DELLA HD-I-INNOVA

Wattage :
1X29W | 1X31W
1X35W | 1X37W

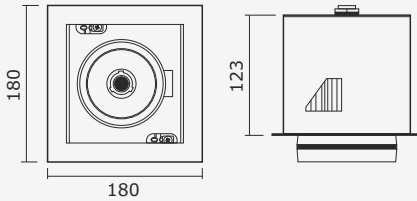


Cut Sq. 151X151 mm



DELLA-HD II

Wattage :
2X29W | 2X31W
2X35W | 2X37W

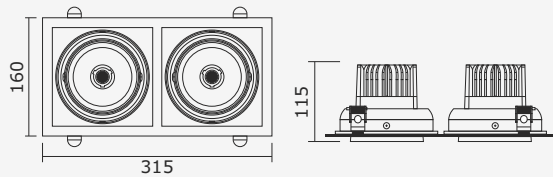


Cut Sq.148X300 mm



DELLA HD-II-INNOVA

Wattage :
2X29W | 2X31W
2X35W | 2X37W

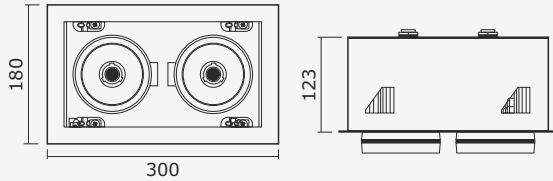

Cut Sq. 151X270 mm


All dimensions are in mm

All dimensions are in mm



DELCLORY-DX-I

Wattage :
1X20W | 1X24W | 1X27W
1X29W | 1X31W | 1X35W

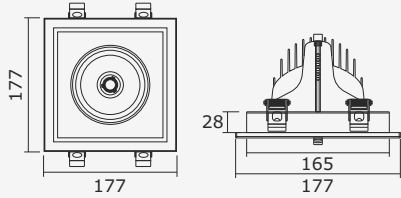


Cut Sq. 165X165 mm



DELCLORY-DX-II

Wattage :
2X20W | 2X24W | 2X27W
2X29W | 2X31W | 2X35W

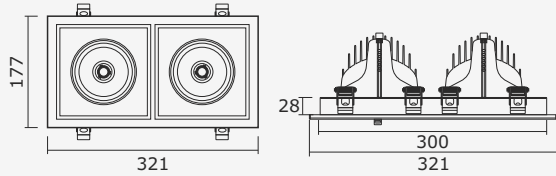


Cut Sq. 165X300 mm



DELCLORY-DX-III

Wattage :
2X20W | 2X24W | 2X27W
2X29W | 2X31W | 2X35W

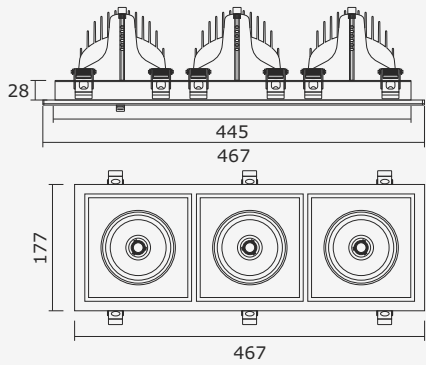

Cut Sq. 165X445 mm





PRECISION LIGHTING, ELEVATED DESIGN

Adjustable spotlights and
wall washers For exceptional
illumination

WALL WASHER SERIES

Transforming Spaces with Precision Lighting

At the heart of modern lighting solutions lies a perfect balance of innovation, functionality, and design. Our collection of Recess Type Adjustable Spot Lights and Wall Washers is crafted to redefine how light interacts with your space.


The Recess Type Adjustable Spot Light delivers unparalleled versatility with 350-degree rotation and up to 60-degree zoom capabilities. Constructed with premium aluminum and equipped with high-quality reflectors, these lights provide customizable beam angles-narrow, medium, and wide-to suit every requirement, ensuring precise illumination and vibrant color rendering for your displays.

Our sophisticated Wall Washers elevate wall displays, bringing merchandise to life with stunning visuals that captivate attention.

Whether you're accentuating details or creating ambient effects, our lighting solutions seamlessly combine performance and aesthetics to transform your space into a masterpiece. Illuminate with precision and elegance-experience lighting redefined.

Color Reproduction

In order to accurately restore an object's original colors, Gardler Lighting offers a variety of CCT options, including 3000K, 3500K, 4000K, and 5700K. These options enhance the saturation of objects under the lights, bringing them closer to their original colors.



KEY FEATURES

- Aesthetically designed high-performance recess-adjustable wall washer luminaire
- Crafted entirely from durable and high-quality die-cast aluminum
- High-efficiency passive cooling die-cast aluminum light head with sleek design
- Light head is rotatable up to 350 degrees and adjustable up to 45 degrees for customizable lighting options
- Anti-glare ABS front ring for reduced glare and added aesthetic appeal
- High-efficiency vacuum metalized polycarbonate reflector with beam angle options of 12, 24, 45, and 60 degrees
- Utilizes chip-on-board (COB) LED technology for bright and energy-efficient lighting
- Isolated high-efficiency electronic driver technology for enhanced performance
- Easy installation with heavy gauge spring toggle, perfect for false ceiling applications
- Available in powder-coated shades of white, black, grey

WALL WASHER SERIES

Illumination Redefined

Our Recess Type Adjustable Spot Lights and Wall Washers blend innovation, functionality, and design to elevate modern lighting. The spotlights provide flexible adjustability and customizable beam angles, ensuring precise illumination and excellent color rendering for displays. Complementing this, our Wall Washers create captivating visuals, bringing wall displays to life. Together, these solutions seamlessly integrate performance and aesthetics, transforming any space into a masterpiece.

Recess- ADJUSTABLE SPOT LIGHT

GARDLER®

All dimensions are in mm

CLOVIS



IS 10322(PART 5/SEC 2):2012
R-71012963

TECHNICAL SPECIFICATIONS


Light Source	: COB-Chip on Board
Power Consumption	: 22W, 24W, 27W, 29W, 31W, 35W, 37W, 40W
90 CRI	: 3000 K 3500 K 4000 K
80 CRI	: 5700 K
Driver	: Constant Current AC-DC
Input Voltage Range	: 220-240 V
Output Voltage	: 33V-37V DC
Output Current	: 600 mA, 650 mA, 700 mA, 750 mA, 800 mA, 900 mA, 950 mA, 1050 mA
Power Factor	: >0.98
THD	: <10%

LED PARAMETERS

22W	3000 K, 3500 K, 4000 K, 5700 K	2214 lm, 2334 lm, 2369 lm, 2551 lm
24W	3000 K, 3500 K, 4000 K, 5700 K	2391 lm, 2513 lm, 2562 lm, 2756 lm
27W	3000 K, 3500 K, 4000 K, 5700 K	2686 lm, 2783 lm, 2789 lm, 2979 lm
29W	3000 K, 3500 K, 4000 K, 5700 K	2887 lm, 2934 lm, 3045 lm, 3192 lm
31W	3000 K, 3500 K, 4000 K, 5700 K	3037 lm, 3084 lm, 3144 lm, 3385 lm
35W	3000 K, 3500 K, 4000 K, 5700 K	3412 lm, 3474 lm, 3528 lm, 3794 lm
37W	3000 K, 3500 K, 4000 K, 5700 K	3634 lm, 3725 lm, 3760 lm, 4098 lm
40W	3000 K, 3500 K, 4000 K, 5700 K	3969 lm, 4020 lm, 4093 lm, 4323 lm

Application area for retail space:

Focal area | Peripheral | Show Window | Wall Display

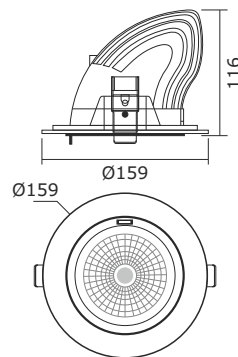

Cut Dia. Ø150 mm


Available Reflector Deg.



Color choice



Black Grey White



Driver options



BIG Small

